

# PROFESSIONAL DMR MOBILE RADIO HM78X

EMPOWER YOUR OPERATION





# EMPOWER YOUR OPERATION

Leading the PMR industry, Hytera possesses comprehensive capabilities of software and hardware development and continually evolves for more than 30 years to provide solutions to tens of thousands of PMR users worldwide.

Hytera now presents the next generation of professional digital mobile radio, the flexible and scalable HM78X. The HM78X supports a standard single control head and remote control head (Single or dual) to suit different environments such as vehicles, motorcycles and fixed control rooms, ensuring efficient communication. Moreover, it provides various connections, through which rich applications can be integrated into existing services to improve work efficiency.

The HM78X adopts a new appearance while maintaining high quality. The new UI interaction facilitates faster operation. The AI-based noise cancellation technology guarantees clearer voice in noisy environments.



# ENHANCED DESIGN


2.4-inch screen, simple UI interaction  
assists in operating quickly

Standard 1DIN size

Faster cooling with all-aluminum  
case design

Built-in speaker assures clear and loud voice  
even without an external speaker

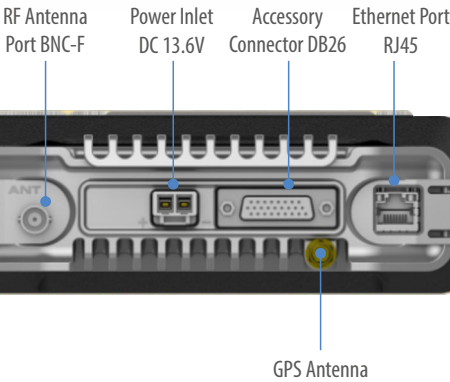

Built-in BT 5.0, allows wireless accessory  
(such as wireless remote speaker microphone)  
adaptation and data transmission.



# PRODUCT HIGHLIGHTS

## MORE FLEXIBLE INSTALLATION

With the flexible control heads and accessories, the HM78X can be installed in various environments to satisfy different use requirements. The connection cable of the remote control head can be either 3m, 10m or 40m as standard. A connection cable of up to 120m is also available(Customisation required).

|             |  |   |  |
|-------------|--|---|--|
| Form        | <br>Standard control head | <br>Remote single/dual control head | <br>Fixed station |
| Application | Small vehicles, motorcycles  | Ambulance, fire engine, truck, large bus, dispatching room  | desktop office   |

## AI-BASED NOISE CANCELLATION FOR CLEARER AUDIO

The HM78X adopts AI noise cancellation technology to filter out background noise (such as road noise), eliminate echoes, extract human voices from noise, and reduce howling and exhalation sounds at close proximity. With this technology, the mobile radio provides crisper and clearer audio for the other party.

The advantages of AI noise cancellation are as follows.

- **Clearer**  
Extremely high noise cancellation on steady and unsteady noise, up to 30dB  
Can reduce howling outside 30cm
- **Faster**  
Accurately extract human voices from noise in milliseconds or even without delay
- **Flexible**  
With deep learning ability, suitable for more noise  
10-level adjustable noise reduce level

## MAIN FEATURES

### Operating Modes

- Conventional(digital/analog)
- Digital trunking

### Security

- Emergency alarm
- Lone worker
- Authentication
- Over the air encryption
- E2EE
  - Basic encryption
  - Full encryption
  - Hardware encryption

### Text Message

- Private message
- Group message
- Quick text
- Status Message

### GPIO Pins

- Public Address
- Horn & Lights
- Voice notify
- Ignition sense

### Solution

- IP Transit
- Back to back
- Wireless link
- Clarity Transmission

### Supplementary

- Alert call(conventional)
- Remote monitor
- Enable/Disable
- Radio check

### Voice Service

- Private call
- Group call
- All call

### Analog Mode

- 2-Tone signaling
- 5-Tone Signalling
- HDC1200



## RICH SCALABLE APPLICATION


HM78X supports multiple connections through BT, and the accessory and network (Ethernet) ports. It also supports Clarity Transmission and back to back connections which will greatly facilitate your solutions. Examples include:

- Allow for collection of data from equipment (Wired or BT) and facilitate transmission of this data to the background platforms using either the IP or radio network.
- The coverage in conventional digital mode can be extended by IP Transit.
- Cross-band or cross-system communication can be achieved through Back-to-Back or IP Transit.
- For situations where repeaters cannot be connected via IP or the cost of doing so is too high, the repeaters can be connected via cable to HM78X to create a wireless link between regions. This could be useful in industries such as oil extraction where offshore oil rigs are used.

## Application Solution

### Clarity Transmission

The data Clarity Transmission feature provides a transparent channel for data transmission without any change. As a part of the data acquisition and monitoring control system, the HM78X provides customers with solutions for monitoring and controlling industrial production processes.

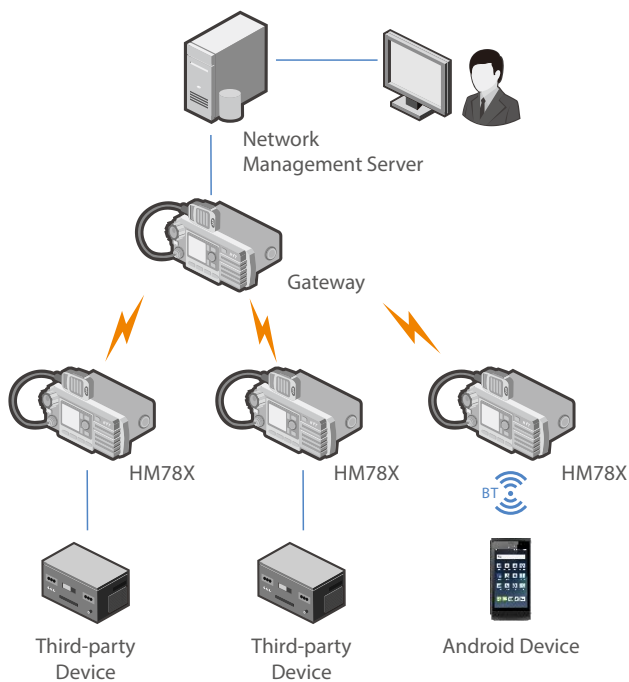

### IP Transit Solution (Digital Mode)


With the Ethernet interface of HM78X, IP Transit offers an economical and simple networking solution that complements the existing two-way radio system.

It can connect two or more conventional communication systems in different areas through IP network to solve the communication problems across regions, complex terrains, or in buildings where signals are difficult to penetrate.

It can connect mobile radios working with different frequency bands to solve the across-band communication problems, this greatly saves on cost due to only requiring one frequency and it moves the need for additional infrastructure and complex configuration.

The IP Transit solution supports the following services:

- All voice calls (including calls with acknowledgement)
- All data services
- All signaling

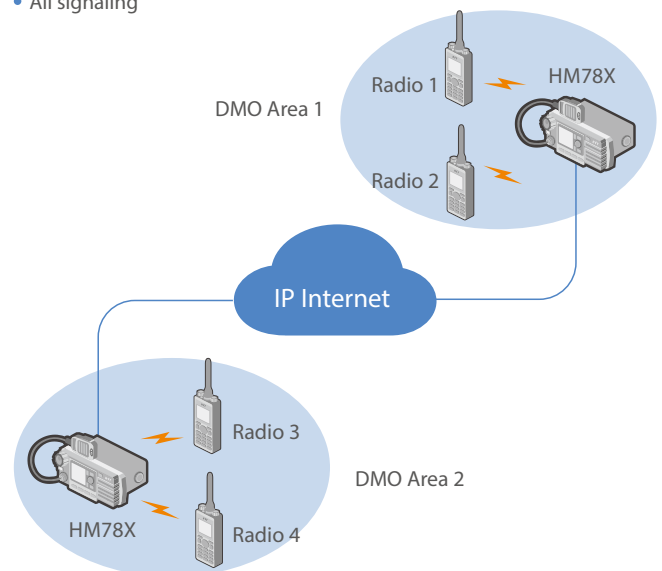

## Police Car Application



## Fire Engine Application

Conventional(digital/analog)  
Digital trunking  
Remote single/dual control head





# SPECIFICATIONS

| General                |  |         |      |
|------------------------|--|---------|------|
| Frequency Range        | UHF: 350-470MHz, 806-941MHz<br>VHF: 136-174MHz |         |      |
| Channel Capacity       | 1024   |         |      |
| Zone Capacity          | 64(each with a maximum of 256 channels)        |         |      |
| Channel Spacing        | 12.5kHz/20kHz/25kHz                            |         |      |
| Operating Voltage      | 13.6 V ±15%                                    |         |      |
| Current Drain          | Standby  | < 0.5A  |      |
|                        | Receive  | < 2.0A  |      |
|                        | Transmit                                       | 1W      | <3A  |
|                        |  | 5W      | <4A  |
|                        |  | 25W     | <8A  |
|                        |  | 45W/50W | <12A |
| Frequency Stability    | ±0.5 ppm                                       |         |      |
| Antenna Impedance      | 50Ω  |         |      |
| Dimensions (H x W x D) | 61.5 x 177 x 179 mm                            |         |      |
| Weight                 | 1520g  |         |      |
| LCD Display            | 2.4 inch                                       |         |      |

| Receiver                    |         |   |      |
|-----------------------------|---------|---|------|
| Sensitivity                 | Analog  | 0.18μV(12dB SINAD)<br>0.16μV(Typical)(12dB SINAD) |      |
|                             | Digital | 0.18μV/BER5%                                      |      |
| Selectivity                 | TIA-603 | 65dB@12.5kHz / 75dB@20/25kHz                      |      |
|                             | ETSI    | 60dB@12.5kHz / 70dB@20/25kHz                      |      |
| Intermodulation             | TIA-603 | 75dB@12.5/20/25kHz                                |      |
|                             | ETSI    | 70dB@12.5/20/25kHz                                |      |
| Spurious Response Rejection | TIA-603 | 75dB@12.5/20/25kHz                                |      |
|                             | ETSI    | 70dB@12.5/20/25kHz                                |      |
| Blocking                    | TIA-603 | 80dB  |      |
|                             | ETSI    | 84dB  |      |
| Hum and Noise               |         | 40dB@12.5kHz,43dB@20kHz,<br>45dB@25kHz            |      |
| Rated Audio Power Output    |         | Internal (20 Ohm load)                            | 3W   |
|                             |         | External (8 Ohm load)                             | 7.5W |
| Max Audio Power Output      |         | Internal (20 Ohm load)                            | 8W   |
|                             |         | External (8 Ohm load)                             | 20W  |
| Rated Audio Distortion      |         | ≤3%   |      |
| Audio Response              |         | +1 ~ -3dB   |      |
| Conducted Spurious Emission |         | <-57dBm   |      |

| Transmitter                 |  |
|-----------------------------|--|
| RF Power Output             | Low power :<br>136-174MHz:1-25W<br>350-470MHz:1-25W, 806-941MHz: 10W<br>High power:<br>136-174MHz: 5-50W, 350-470MHz:1-45W,<br>806-941MHz: 35W |
| FM Modulation               | 11K0F3E@12.5kHz; 14K0F3E@20kHz;<br>16K0F3E@25kHz   |
| 4FSK Digital Modulation     | 12.5kHz Data Only: 7K60FXD<br>12.5kHz Data and Voice: 7K60FXW  |
| Conducted/Radiated Emission | -36dBm<1GHz; -30dBm>1GHz   |
| Modulation Limiting         | ±2.5kHz @ 12.5kHz; ±4.0kHz @ 20kHz;<br>±5.0kHz @ 25kHz   |
| FM Hum & Noise              | 40dB @ 12.5kHz; 43dB @ 20kHz<br>45dB @ 25kHz   |
| Adjacent Channel Power      | 60dB @ 12.5kHz; 70dB @ 20/25kHz  |
| Audio Response              | +1 ~ -3dB  |
| Audio Distortion            | ≤3%  |
| Digital Vocoder Type        | AMBE+2™  |
| Digital Protocol            | ETSI-TS102 361-1,-2,-3   |

| Environmental          |  |
|------------------------|--|
| Operating Temperature  | -30°C~+60°C  |
| Storage Temperature    | -40°C~+85°C  |
| ESD                    | IEC 61000-4-2 (Level 4)<br>±8kV ( Contact )<br>±15kV (Air) |
| Dustproof & Waterproof | IP54   |
| Humidity               | Per MIL-STD-810H Standard                                  |
| Shock & Vibration      | Per MIL-STD-810H Standard                                  |

| Location Service                    |                            |
|-------------------------------------|----------------------------|
| GNSS                                | *GPS, GPS+GLONASS, GPS+BDS |
| TTFF (Time To First Fix) Cold Start | <1minute                   |
| TTFF (Time To First Fix) Hot Start  | <10seconds                 |
| Horizontal Accuracy                 | <5meters                   |

\*Accuracy specs are for long-term tracking (95th percentile values>5 satellites visible at a nominal -130dBm signal strength)

# ACCESSORIES

## Standard



Conventional model:  
palm microphone  
without keypad



Trunking model:  
palm microphone  
with keypad



Mounting bracket



Power cord



Fuse



Model with GPS:  
GPS antenna

## Optional



DB26 connector  
external speaker



10-pin connector  
desktop microphone



Power supply for  
mobile radio



Programming cable



DB26 Connector foot PTT



Ignition cable



Antenna




DB26M-DB9M cable connects  
mobile radio and repeater for  
wireless link solution



DB26-DB26 cable connects  
two repeater to realize  
cross-band(VHF\_UHF) or  
cross mode(analog\_digital)  
communication



Power supply of fixed  
station cabinet



BT Wireless remote  
speaker microphone



BT Wireless ring PTT



Caelus Wireless Pty Ltd

Address: 2/9 Allgas St, Slacks Creek QLD 4127

E-Mail: [sales@caeluswireless.com.au](mailto:sales@caeluswireless.com.au)